


GRIGLIA AFONICA

INPUT		
Serie	GAF6D	
Base	mm	1.000
Altezza	mm	1.500
Portata	mc/h	5.000
OUPUT		
Area	Vk (m/s)	1,54
Perdite di carico	ΔP (Pa)	17,56
PORTATA ACCETTABILE		
Portata minima	mc/h	4.475
Portata massima	mc/h	13.400

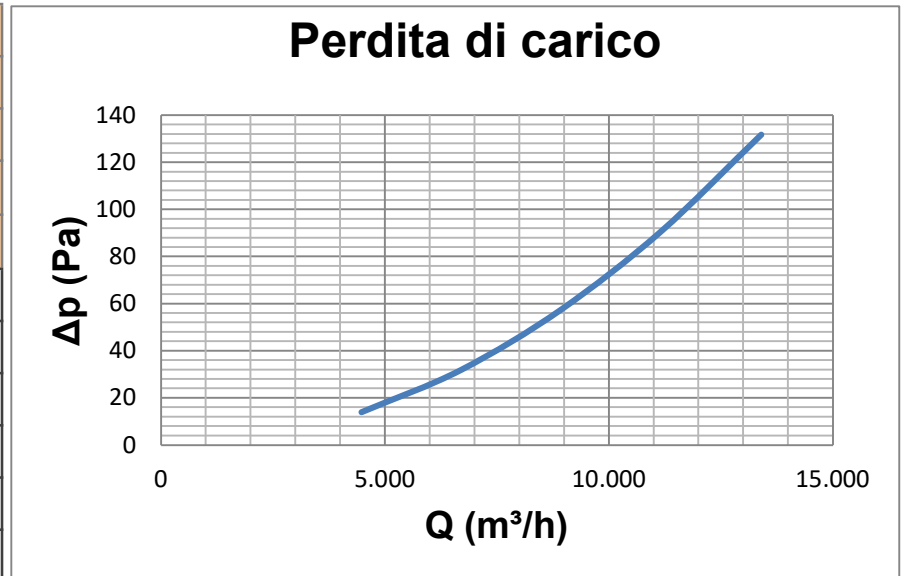

ATTENUAZIONE D'INSERIZIONE

Modello	D_s	[dB]	3	4	5	9	12	15	14	15
GAF30 - 300 mm	D_s	[dB]	3	4	5	9	12	15	14	15
GAF6D - 300+300 mm	D_s	[dB]	4	5	9	15	22	27	25	24

POTERE FONOISOLANTE

Modello	R_w	[dB]	6	7	10	14	17	15	14,5
GAF30 - 300 mm	R_w	[dB]	6	7	10	14	17	15	14,5
GAF6D - 300+300 mm	R_w	[dB]	6	10	17	24	30	27	21,8

